

ROSIE LI



Lina 03 Diamond Wallmount Installation Instructions

SAFETY

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED

BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS TURNED OFF. TURNING THE POWER OFF USING THE LIGHT SWITCH IS NOT SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

WARNING! – TO REDUCE THE RISK OF FIRE, ELECTRIC SHOCK, OR PERSONAL INJURY:

Turn off/unplug lamp and allow to cool before replacing bulb.

Do not look directly at lighted bulb.


Keep materials that burn easily away from lighted bulb.

Improper use of the bulbs can result in shattering, causing injury and equipment damage.

NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions or situations that may occur. It must be understood that common sense, caution, and care, are factors which cannot be built into any product. These factors must be supplied by the person(s) installing this unit.

INSTALLATION

- 1) Ensure power is disconnected before beginning
- 2) Secure crossbar with threaded nipple to crossbar with screws
- 3) Before wiring, place sconce or flushmount onto threaded nipple. If the thread passing through the mounting hole is too short or long, adjust the length of the nipple at the crossbar.
- 4) Connect the NEUTRAL (white) fixture wire to the NEUTRAL (white) wire of the supply circuit and secure.
- 5) Connect the HOT (black) fixture wire to the HOT (black) wire of the supply circuit and secure.
- 6) Place wiring back into the junction box.
- 7) Slide the sconce or flushmount over the threaded nipple and secure fixture with half round finial by hand till fixture is secure.

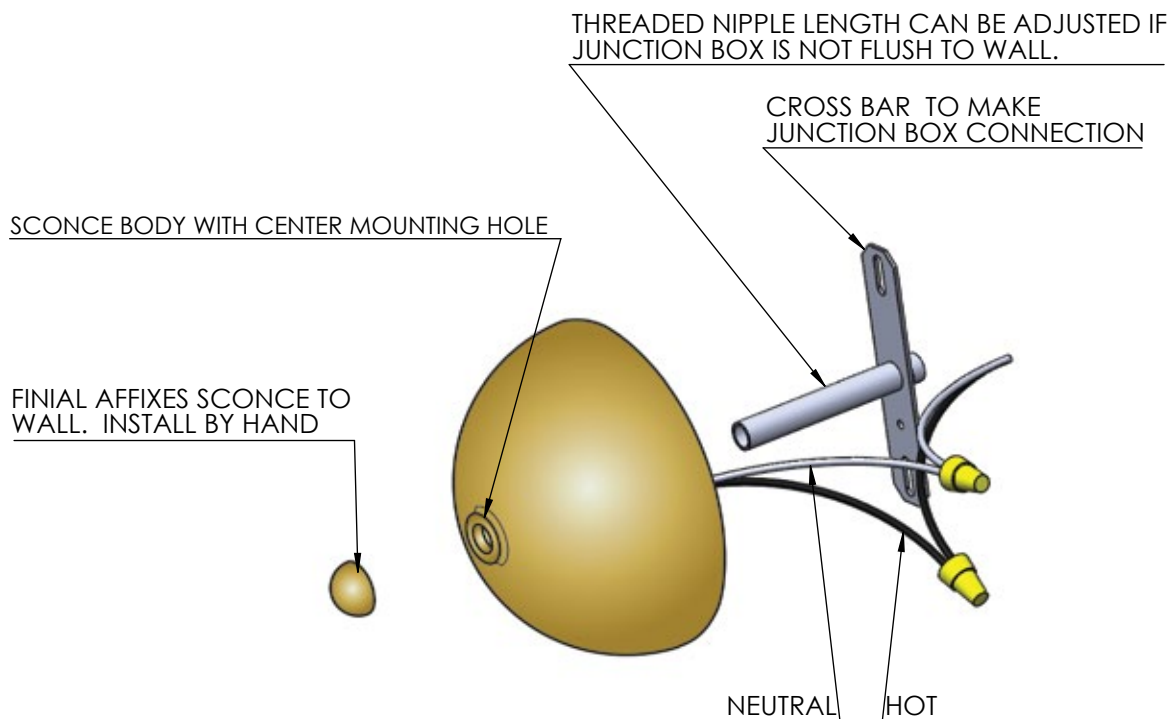

CLEANING

Use only soft cloth to dust and clean fixture. Never use chemicals or abrasive cleaners as it may damage glass.