

ROSIE LI



Lina 04 Diamond Chandelier Installation Instructions

SAFETY

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED

BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS TURNED OFF. TURNING THE POWER OFF USING THE LIGHT SWITCH IS NOT SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

WARNING! – TO REDUCE THE RISK OF FIRE, ELECTRIC SHOCK, OR PERSONAL INJURY:

Turn off/unplug lamp and allow to cool before replacing bulb.

Do not look directly at lighted bulb.


Keep materials that burn easily away from lighted bulb.

Improper use of the bulbs can result in shattering, causing injury and equipment damage.

NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions or situations that may occur. It must be understood that common sense, caution, and care, are factors which cannot be built into any product. These factors must be supplied by the person(s) installing this unit.

INSTALLATION

- 1) Ensure power is disconnected before beginning.
- 2) Screw threaded rod into crossbar, ensuring the end with the cable gripper is facing down.
- 3) Secure crossbar to junction box.
- 4) Slide canopy support followed by the canopy down the suspension cable.
- 5) Pull supply wire through the second hole in the canopy.
- 6) Push suspension cable through cable gripper until pendant is at desired height.
- 7) Connect the green fixture GROUND wire to the GROUND wire of the supply circuit.
- 8) Connect the NEUTRAL (white) fixture wire to the NEUTRAL (white) wire of the supply circuit and secure.
- 9) Connect the HOT (black) fixture wire to the HOT (black) wire of the supply circuit and secure.
- 10) Place wiring back in the junction box.
- 11) Slide canopy and canopy support to cover junction box, screw canopy support onto exposed threaded rod to hold canopy in place.

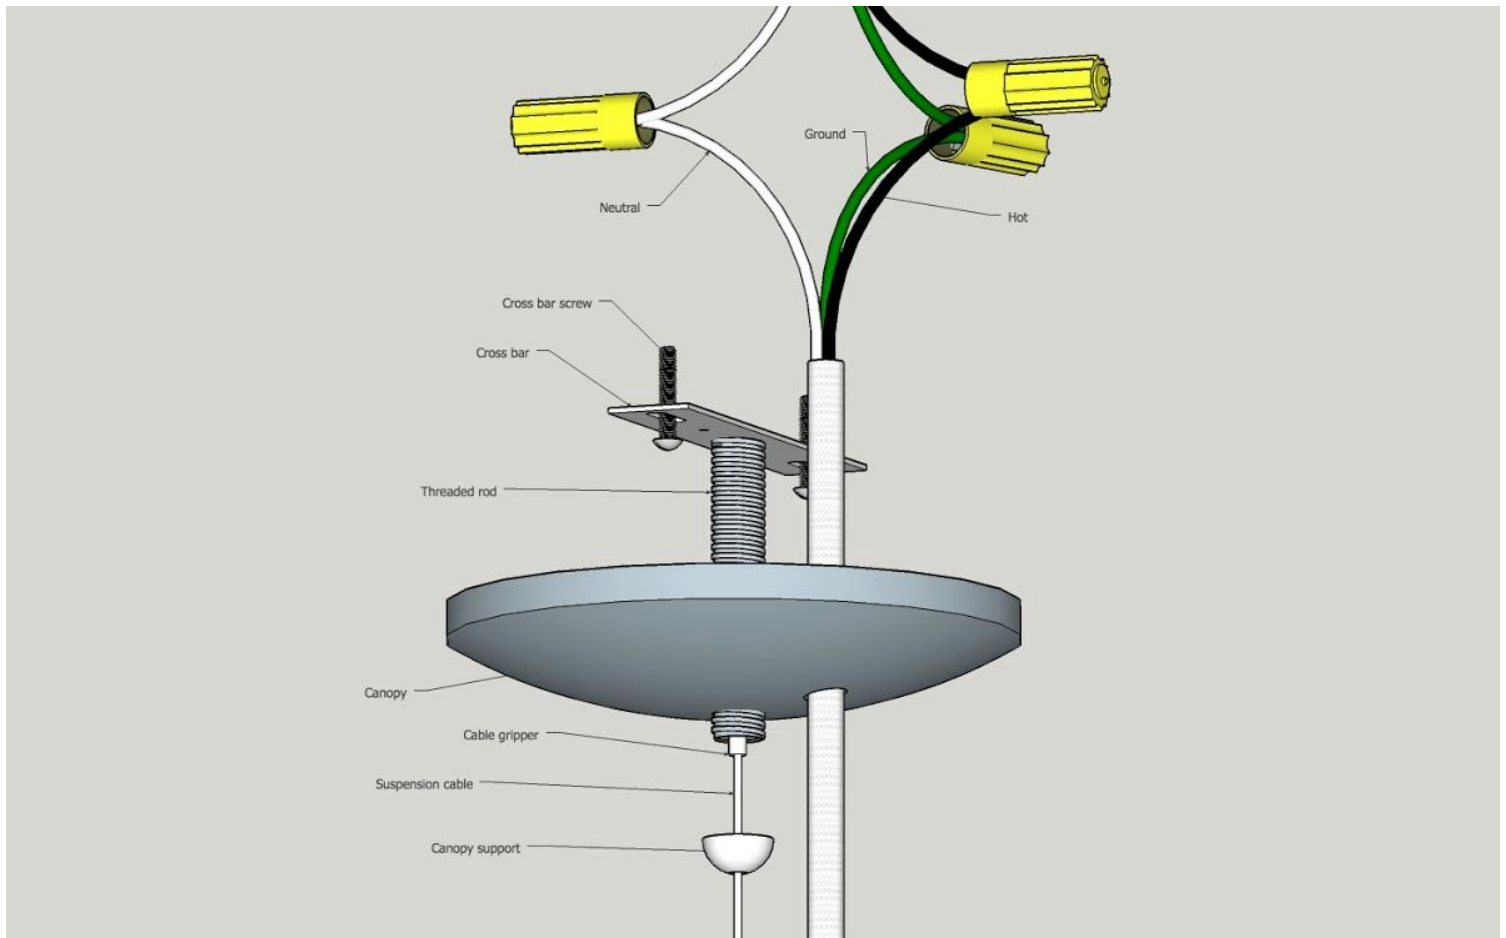

CLEANING

Use only soft cloth to dust and clean fixture. Never use chemicals or abrasive cleaners as it may damage glass.


Additional Hanging Instructions for Lina 4 Diamond

This fixture has an updated hanging system to allow the user to install this fixture in a fixed direction.

Please follow these steps in addition to the provided hanging instructions.

1) After unpacking, release the canopy by unscrewing the knurled bushing as shown below. Notice each aircraft cable ends in a cable gripper. Wires can be fed one way. To release the cable, remove any weight and press the tip, the wire will be able to move freely.

Also notice the crossbar at the top of the hanging assembly. The height of the crossbar can be adjusted if the junction box is not flush with the finished ceiling. Also notice the angle of the crossbar relative to the 2 hanging cables can be adjusted. Adjust the crossbar angle and height as needed for the particular installation.

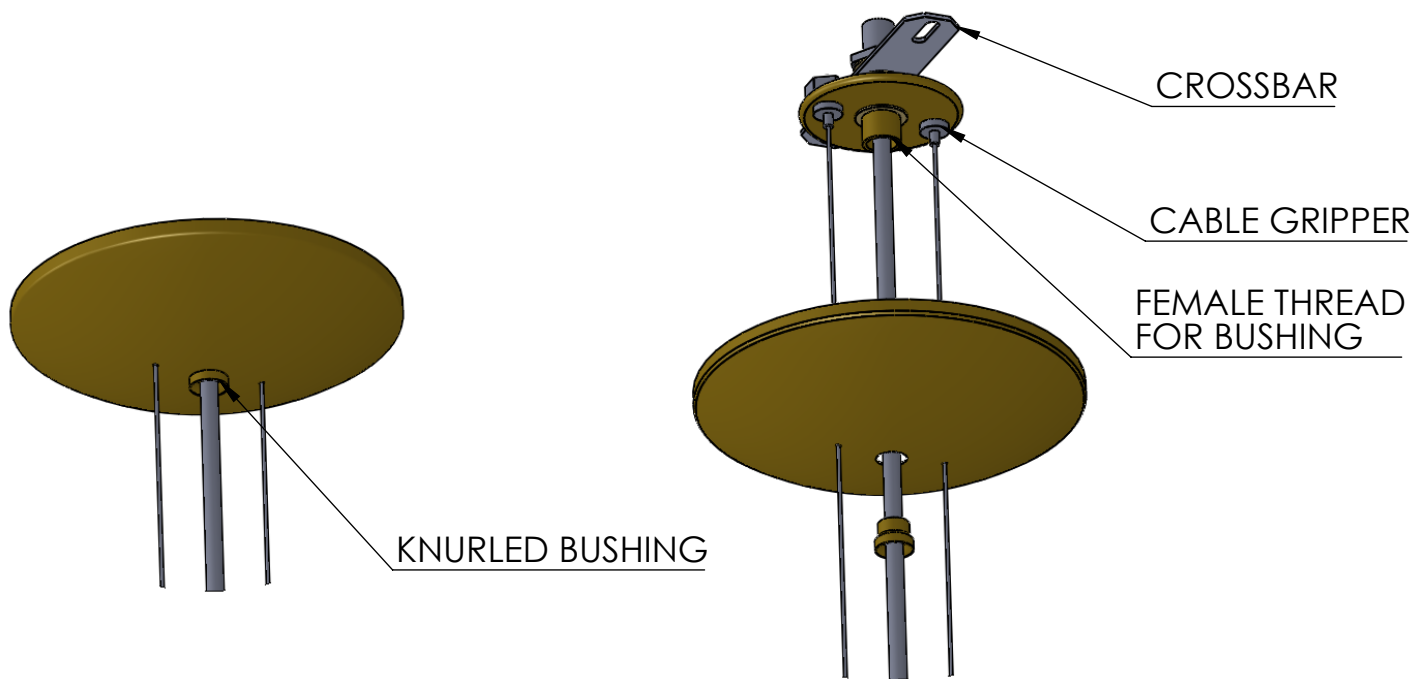

2) Set fixture on floor and mark cables for the fixtures hanging height. Check to be sure the electrical cord has enough slack. Trim both aircraft cable and electrical cord. Leave about 2-4" extra aircraft cable, and 1-3" of shielding on cable, not including led wires. Extra cable can be left if the exact height is not known.

3) Mount crossbar and make electrical connections. Use provided cord stop, or knot cable to act as strain relief. The fixture will not be balanced.

4) Before balancing the light fixture, check the canopy sits flush against the ceiling and the bushing is able to thread into the crossbar assembly. If there is a gap in the canopy, or the bushing does not thread in correctly release the top locknut and adjust the crossbar height.

5) Balance the fixture by adjusting the cable grippers and close the canopy with the knurled bushing.