

# ROSIE LI



Bubbly 01 Pendant Installation Instructions

---

## **SAFETY**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED**

**BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS TURNED OFF. TURNING THE POWER OFF USING THE LIGHT SWITCH IS NOT SUFFICIENT TO PREVENT ELECTRICAL SHOCK.**

**WARNING! – TO REDUCE THE RISK OF FIRE, ELECTRIC SHOCK, OR PERSONAL INJURY:**

**Turn off/unplug lamp and allow to cool before replacing bulb.**

**Do not look directly at lighted bulb.**

**Keep materials that burn easily away from lighted bulb.**


**Improper use of the bulbs can result in shattering, causing injury and equipment damage.**

**NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions or situations that may occur. It must be understood that common sense, caution, and care, are factors which cannot be built into any product. These factors must be supplied by the person(s) installing this unit.**

**Please read through all instructions carefully before attempting fixture installation.**


**\*\*\*Light Bulbs and Glass MUST be applied to fixture AFTER ceiling mount installation\*\*\***

Always wear provided gloves when handling fixture. To avoid damage to metal finish, keep fixture wrapping intact during installation; unwrap areas as needed.

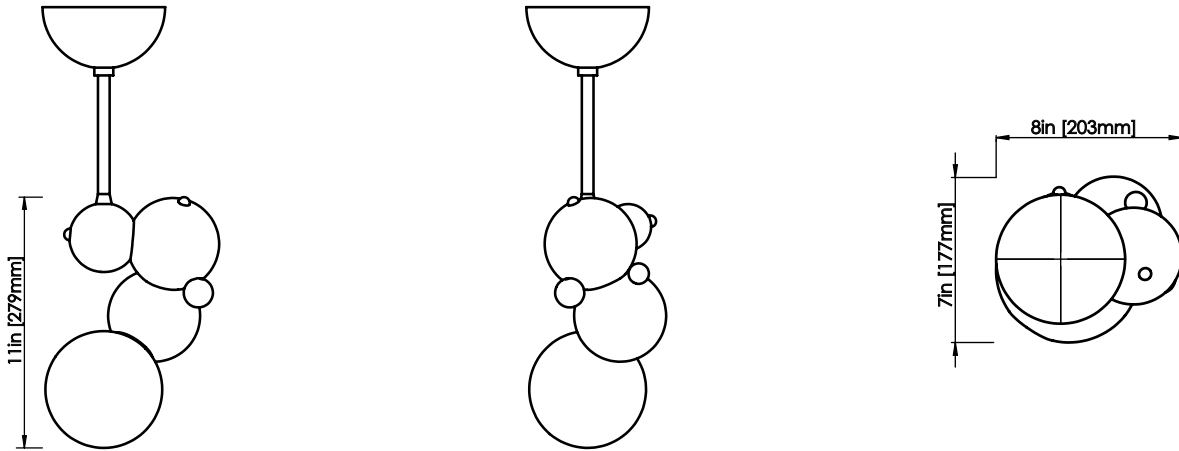


- 1) Install hanging stem onto fixture. Thread electrical wires from the top of the fixture through the stem, screw stem fully onto nipple.
- 2) Locate canopy hanging hardware. Carefully slip the screw collar onto hanging stem, followed by the canopy. Avoid scratches to the metal finish.
- 3) Prepare the junction box to receive the crossbar.
- 4) Secure crossbar to hanging stem as illustrated in the diagram on the next page.
- 5) Connect the NEUTRAL (white) fixture wire to the NEUTRAL (white) wire of the supply circuit and secure.
- 6) Connect the HOT (black) fixture wire to the HOT (black) wire of the supply circuit and secure.
- 7) Place wiring back in the junction box.
- 8) Bring canopy flush with ceiling to close junction box. Affix canopy position with screw collar.
- 9) Install bulb
- 10) Install glass by slipping over bulbs and screwing in (see diagram pg. 4). Screw glass in fully, DO NOT over tighten.

# Canopy Installation Instructions

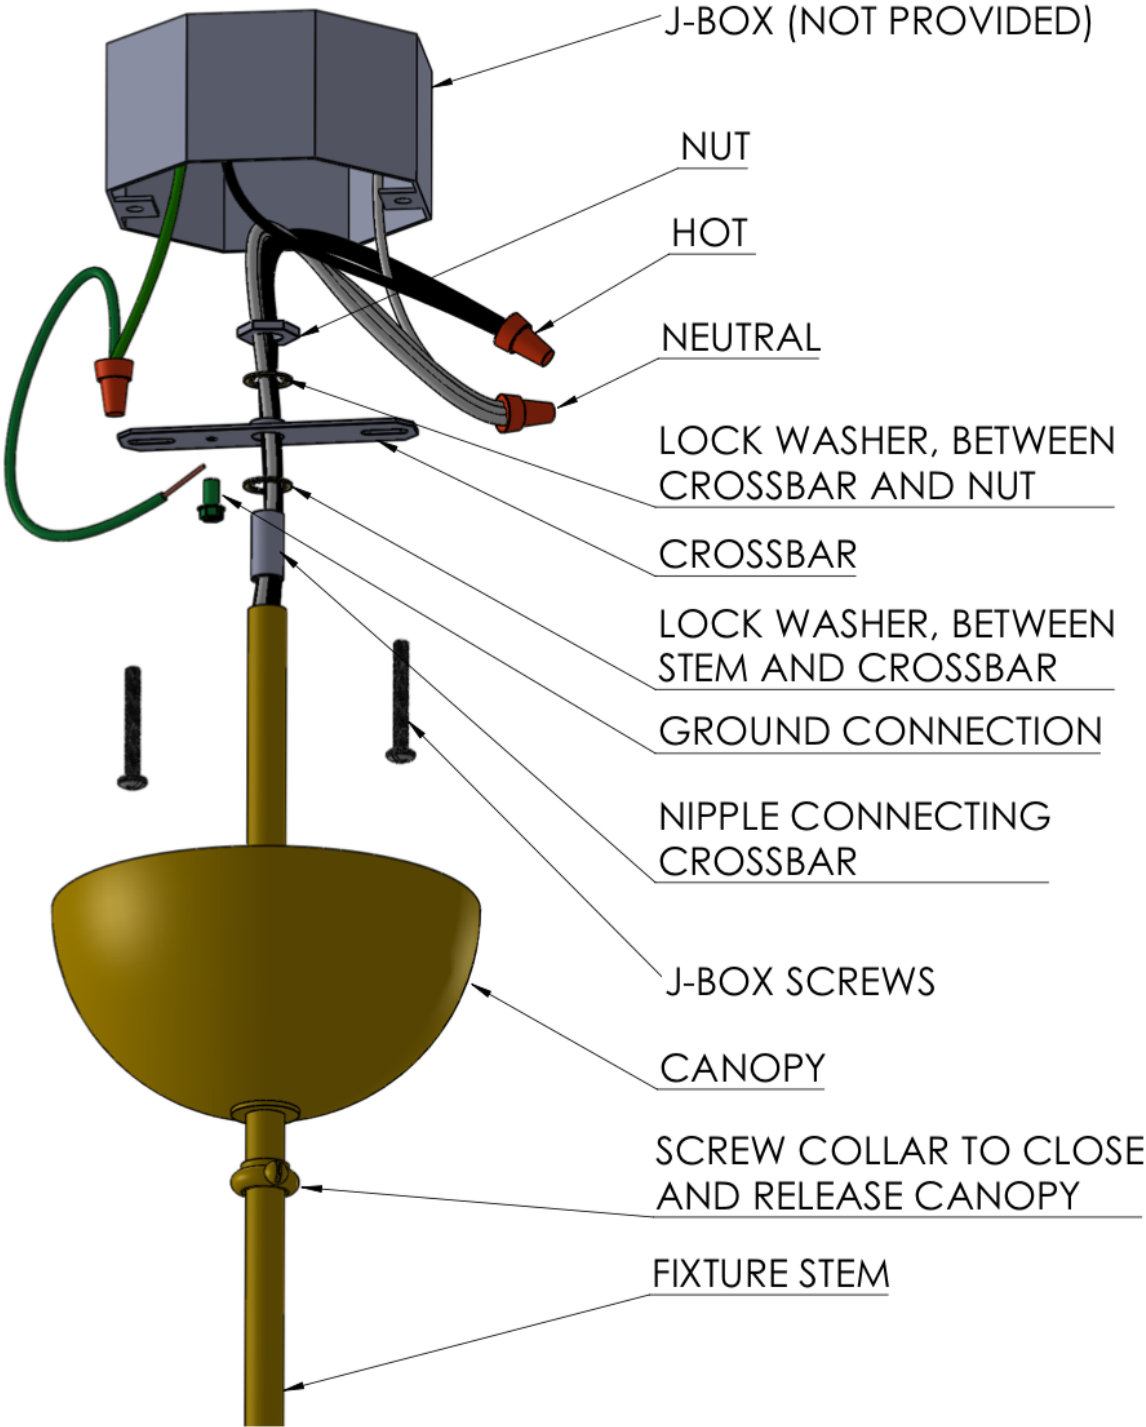

## INSTALLATION CONT.

### Installing Light Bulbs + Glass

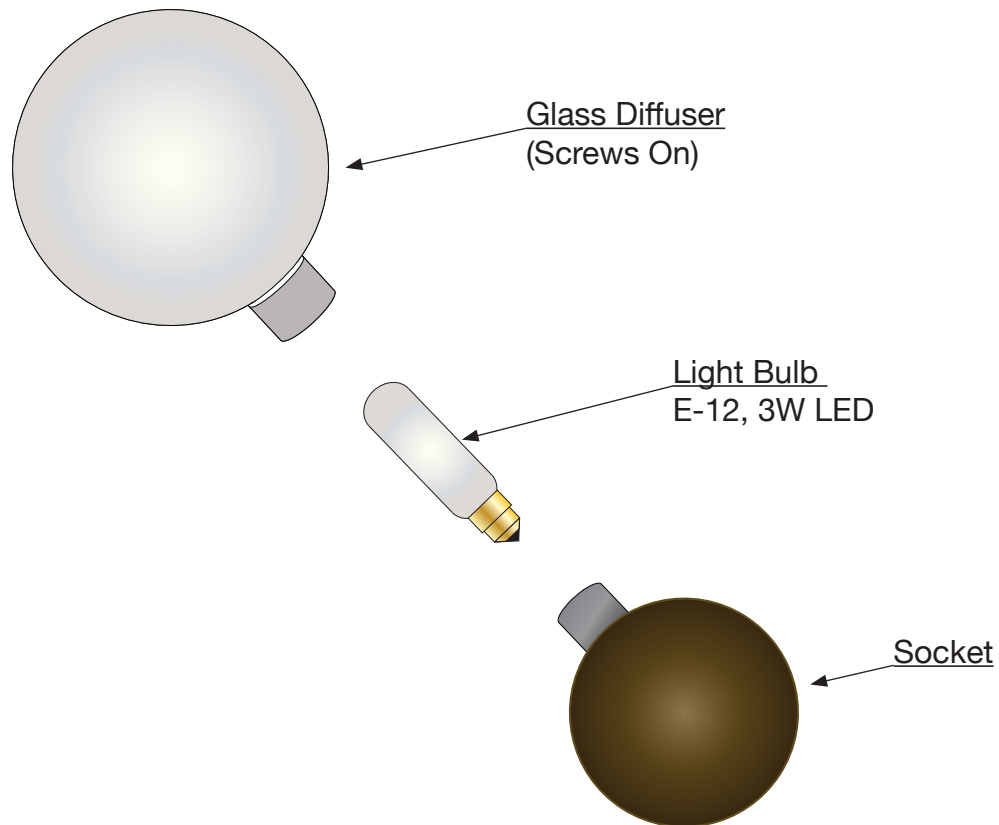

### Cleaning

Use only soft, dry cloth to dust and clean fixture. Regular cleaning and routine maintenance will reduce the need for deep cleaning. Avoid use of chemicals or abrasive cleaners as it may damage metal and glass finish.