

# ROSIE LI



Laurel 01 Sconce with Glass Installation Instructions

---

## SAFETY

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED**

**BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS TURNED OFF. TURNING THE POWER OFF USING THE LIGHT SWITCH IS NOT SUFFICIENT TO PREVENT ELECTRICAL SHOCK.**

**WARNING! – TO REDUCE THE RISK OF FIRE, ELECTRIC SHOCK, OR PERSONAL INJURY:**

**Turn off/unplug lamp and allow to cool before replacing bulb.**

**Do not look directly at lighted bulb.**

**Keep materials that burn easily away from lighted bulb.**

**Improper use of the bulbs can result in shattering, causing injury and equipment damage.**

**NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions or situations that may occur. It must be understood that common sense, caution, and care, are factors which cannot be built into any product. These factors must be supplied by the person(s) installing this unit.**

**Please read through all instructions carefully before attempting fixture installation.**

**\*\*\*Light Bulb and Glass MUST be applied to fixture AFTER mounted installation.\*\*\***


Always wear provided gloves when handling fixture. To avoid damage to metal finish, keep fixture wrapping intact during installation; unwrap areas as needed.

- 1) Ensure power is disconnected before beginning installation.
- 2) Locate set screw on the underside of the armback, between the back of the leaf and the backplate. Release set screw and remove crossbar. Note: wires run through the crossbar.
- 3) Affix crossbar assembly with provided screws. (See pg 3 diagram.) When properly installed set screw captures the groove in crossbar assembly. If Junction Box is not flush to the wall, adjust the nipple on the crossbar so the groove is at the correct position for set screw capture.
- 4) Connect the NEUTRAL (white) fixture wire to the NEUTRAL (white) wire of the supply circuit and secure.
- 5) Connect the HOT (black) fixture wire to the HOT (black) wire of the supply circuit and secure.
- 6) Place wiring back into the junction box.
- 7) Slide the sconce onto the crossbar. Align the fixture vertically and tighten the set screw to firmly lock in position.
- 8) If the fixture backplate is not flush to wall, remove sconce, adjust depth of the nipple on the crossbar and repeat step 7.
- 9) Install bulbs.
- 10) Install glass by slipping over bulbs and screwing in. Screw glass in fully, DO NOT overtighten.

## **CLEANING**

Use only soft, dry cloth to dust and clean fixture. Regular cleaning and routine maintenance will reduce the need for deep cleaning. Avoid use of chemicals or abrasive cleaners as it may damage metal and glass finish.

## Junction Box Installation Diagram

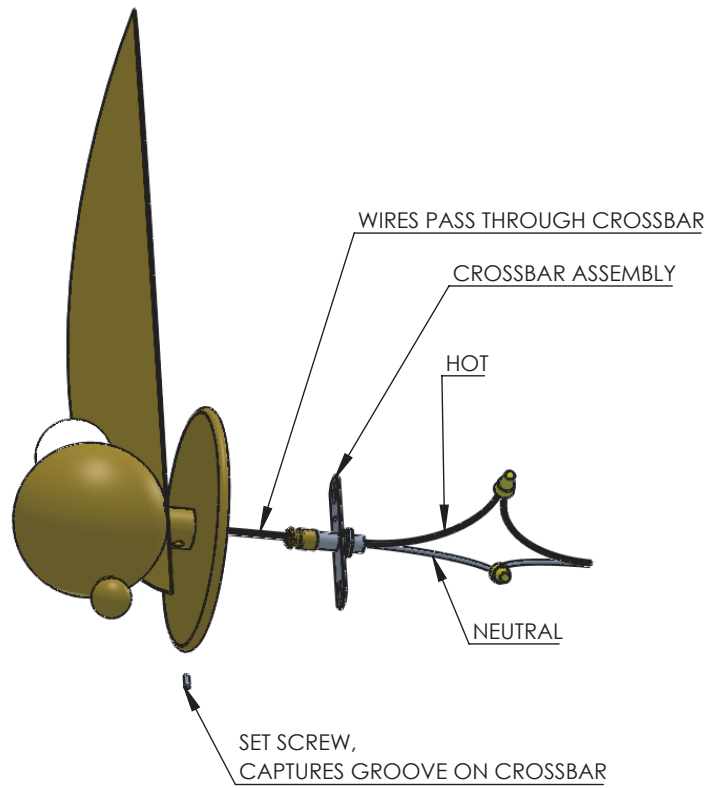

## Glass Installation Diagram

