

# ROSIE LI



Laurel Blossom Sconce Installation Instructions

---

## SAFETY

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED**

**BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS TURNED OFF. TURNING THE POWER OFF USING THE LIGHT SWITCH IS NOT SUFFICIENT TO PREVENT ELECTRICAL SHOCK.**

**WARNING! – TO REDUCE THE RISK OF FIRE, ELECTRIC SHOCK, OR PERSONAL INJURY:**

**Turn off/unplug lamp and allow to cool before replacing bulb.**

**Do not look directly at lighted bulb.**

**Keep materials that burn easily away from lighted bulb.**

**Improper use of the bulbs can result in shattering, causing injury and equipment damage.**

**NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions or situations that may occur. It must be understood that common sense, caution, and care, are factors which cannot be built into any product. These factors must be supplied by the person(s) installing this unit.**


Please read through all instructions carefully and in full before attempting fixture installation.

\*\*\*Leaf and Glass parts to be applied to fixture AFTER ceiling mount installation.\*\*\*


Always wear provided gloves when handling fixture. To avoid damage to metal finish, keep fixture wrapping intact during installation; unwrap areas as needed.

### Installation

- 1) Ensure power is disconnected before beginning
- 2) Locate crossbar and note that the mounting bar has a beveled end. In a typical installation (as shown on Pg 1) the beveled end faces down.

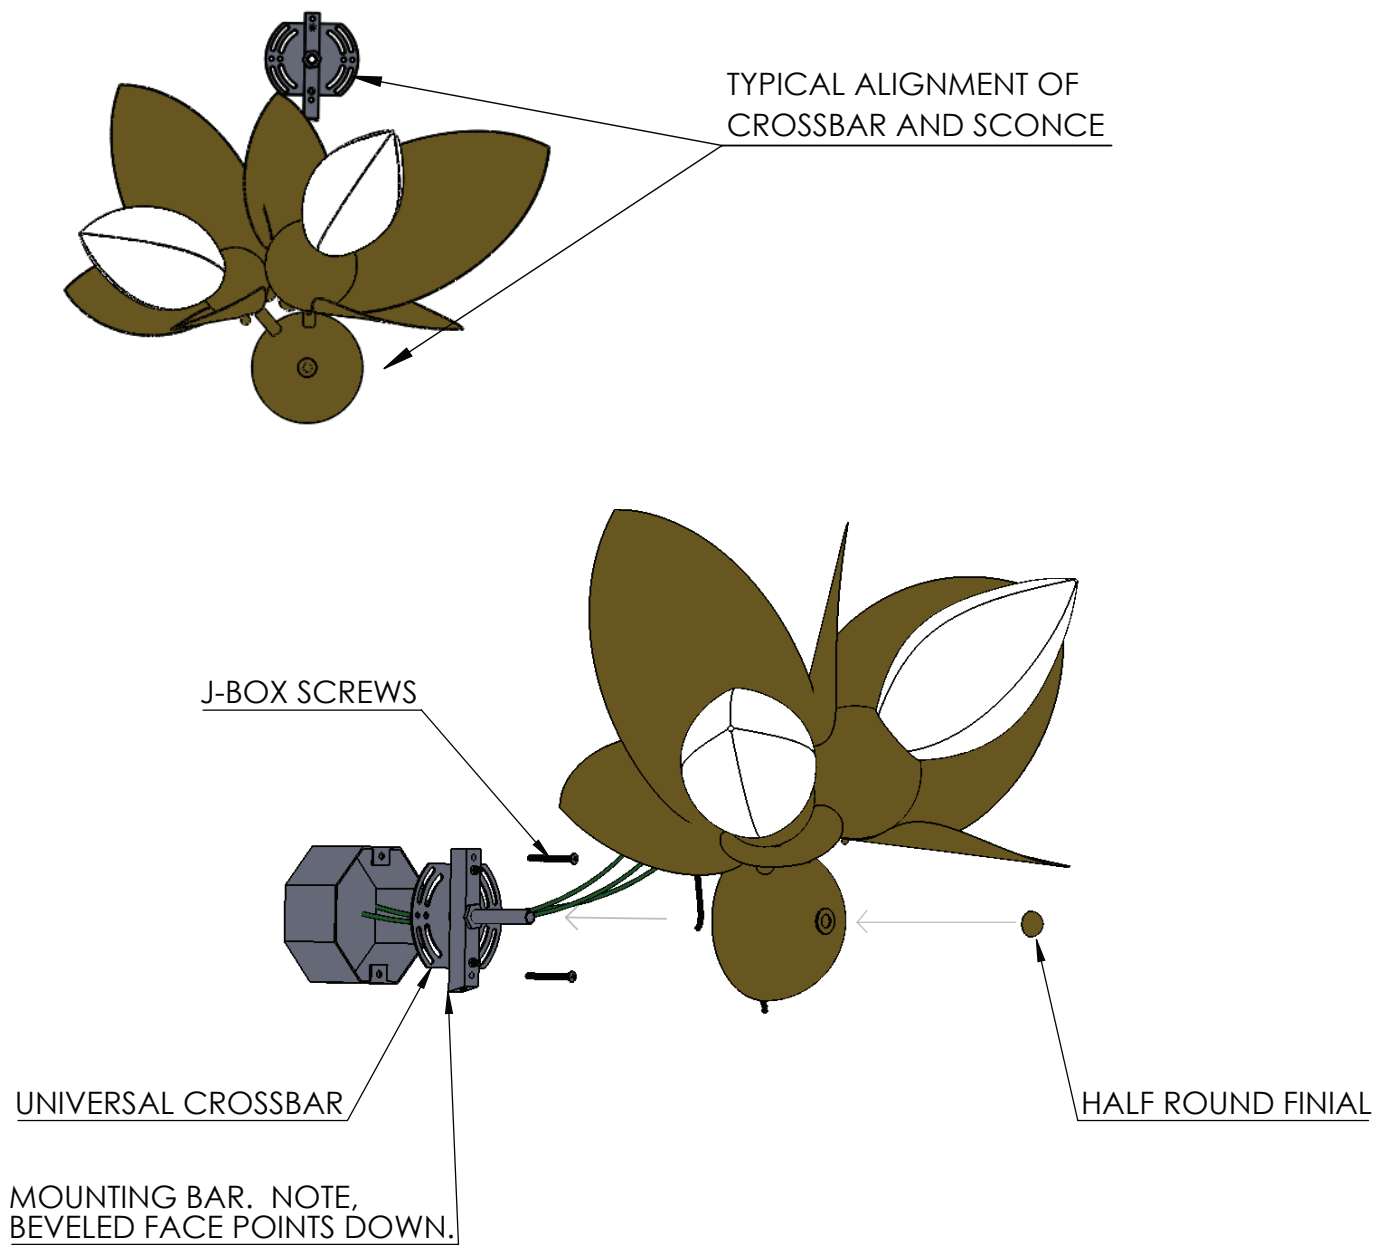


- 3) Remove set screw from the beveled end of mounting bar. Connect crossbar to junction box.
- 4) Unwrap the sconce and locate the 3/4" half round finial used to connect the sconce to the crossbar.
- 5) Make junction box electrical connections. Connect the GROUND fixture wire to the GROUND (green) wire of the supply circuit and secure.
- 6) Connect the NEUTRAL (white) fixture wire to the NEUTRAL (white) wire of the supply circuit and secure.
- 7) Connect the HOT (black) fixture wire to the HOT (black) wire of the supply circuit and secure.
- 8) Place the wires back into the junction box.
- 9) Slide the fixture over the threaded nipple and secure the fixture with the half round finial so it is secured
- 10) Install #8-32 set screw to the mounting bar, through the backplate as shown below. A hex key is provided in the hardware bag.
- 11) Remove all other protective packaging wrapped around fixture
- 12) Install light bulbs

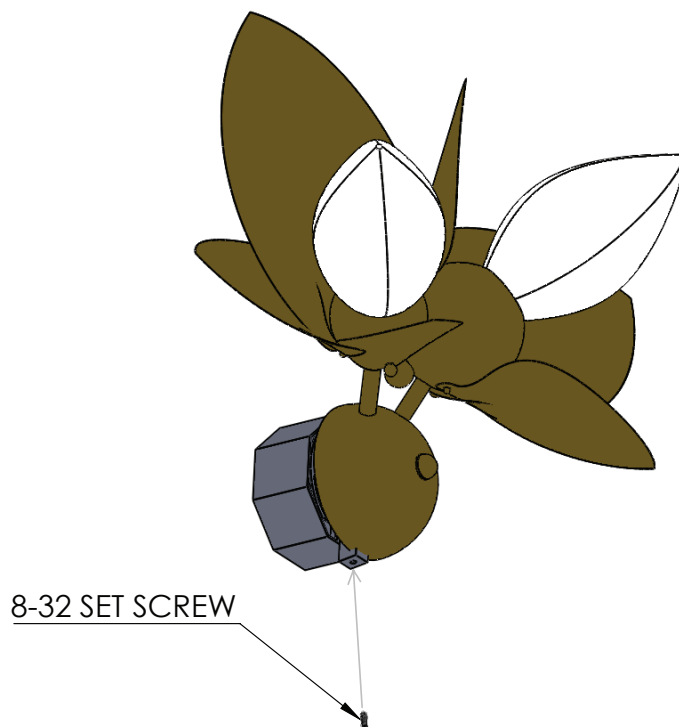

## INSTALLATION CONT.

13) Install glass by slipping over bulbs and screwing in (see diagram below). Screw glass in fully, DO NOT over tighten.

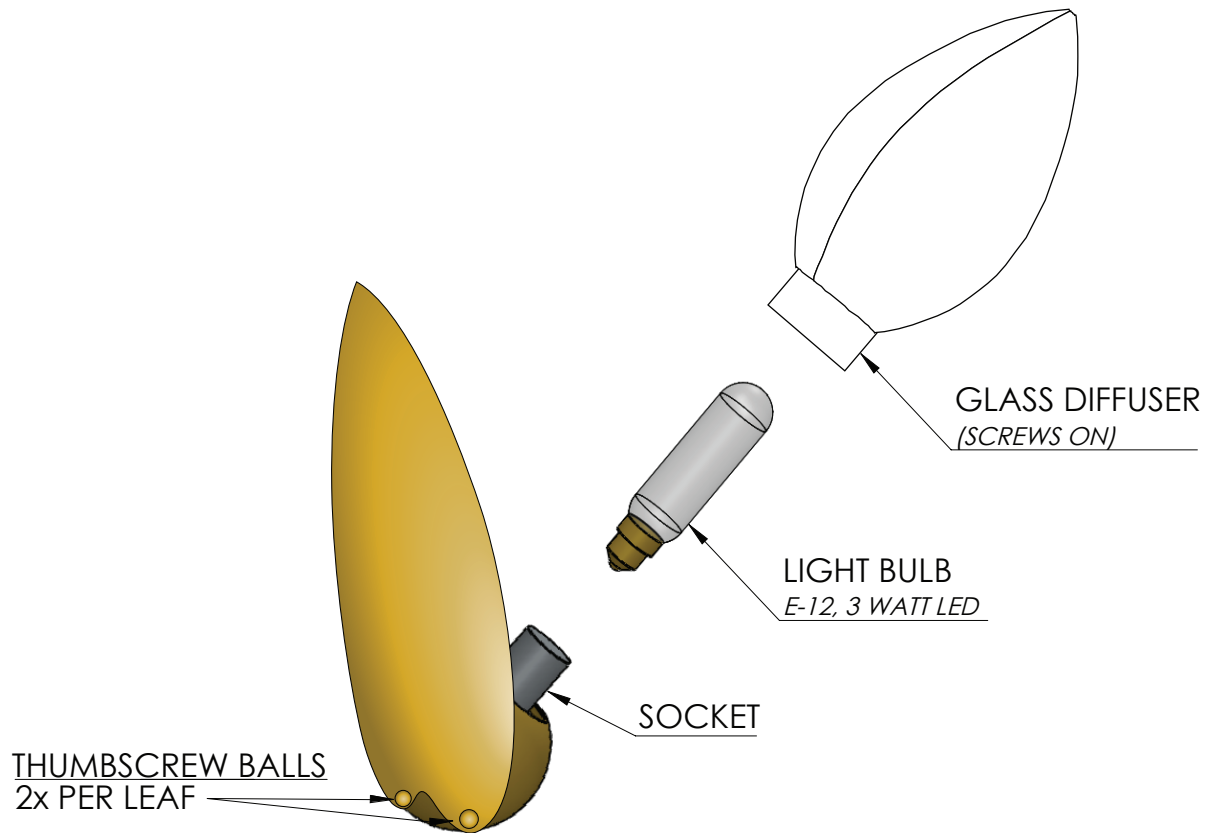

## Cleaning

Use only soft, dry cloth to dust and clean fixture. Never use chemicals or abrasive cleaners as it may damage metal and glass finish.