

# ROSIE LI



## Lina 03 Triangle Pendant Installation Instructions

---

### **SAFETY**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED**

**BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS TURNED OFF. TURNING THE POWER OFF USING THE LIGHT SWITCH IS NOT SUFFICIENT TO PREVENT ELECTRICAL SHOCK.**

**WARNING! – TO REDUCE THE RISK OF FIRE, ELECTRIC SHOCK, OR PERSONAL INJURY:**

**Turn off/unplug lamp and allow to cool before replacing bulb.**

**Do not look directly at lighted bulb.**


**Keep materials that burn easily away from lighted bulb.**

**Improper use of the bulbs can result in shattering, causing injury and equipment damage.**

**NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions or situations that may occur. It must be understood that common sense, caution, and care, are factors which cannot be built into any product. These factors must be supplied by the person(s) installing this unit.**

## INSTALLATION

- 1) Ensure power is disconnected before beginning.
- 2) Screw threaded rod into crossbar, ensuring the end with the cable gripper is facing down.
- 3) Secure crossbar to junction box.
- 4) Slide canopy support followed by the canopy down the suspension cable.
- 5) Pull supply wire through the second hole in the canopy.
- 6) Push suspension cable through cable gripper until pendant is at desired height.
- 7) Connect the green fixture GROUND wire to the GROUND wire of the supply circuit.
- 8) Connect the NEUTRAL (white) fixture wire to the NEUTRAL (white) wire of the supply circuit and secure.
- 9) Connect the HOT (black) fixture wire to the HOT (black) wire of the supply circuit and secure.
- 10) Place wiring back in the junction box.
- 11) Slide canopy and canopy support to cover junction box, screw canopy support onto exposed threaded rod to hold canopy in place.

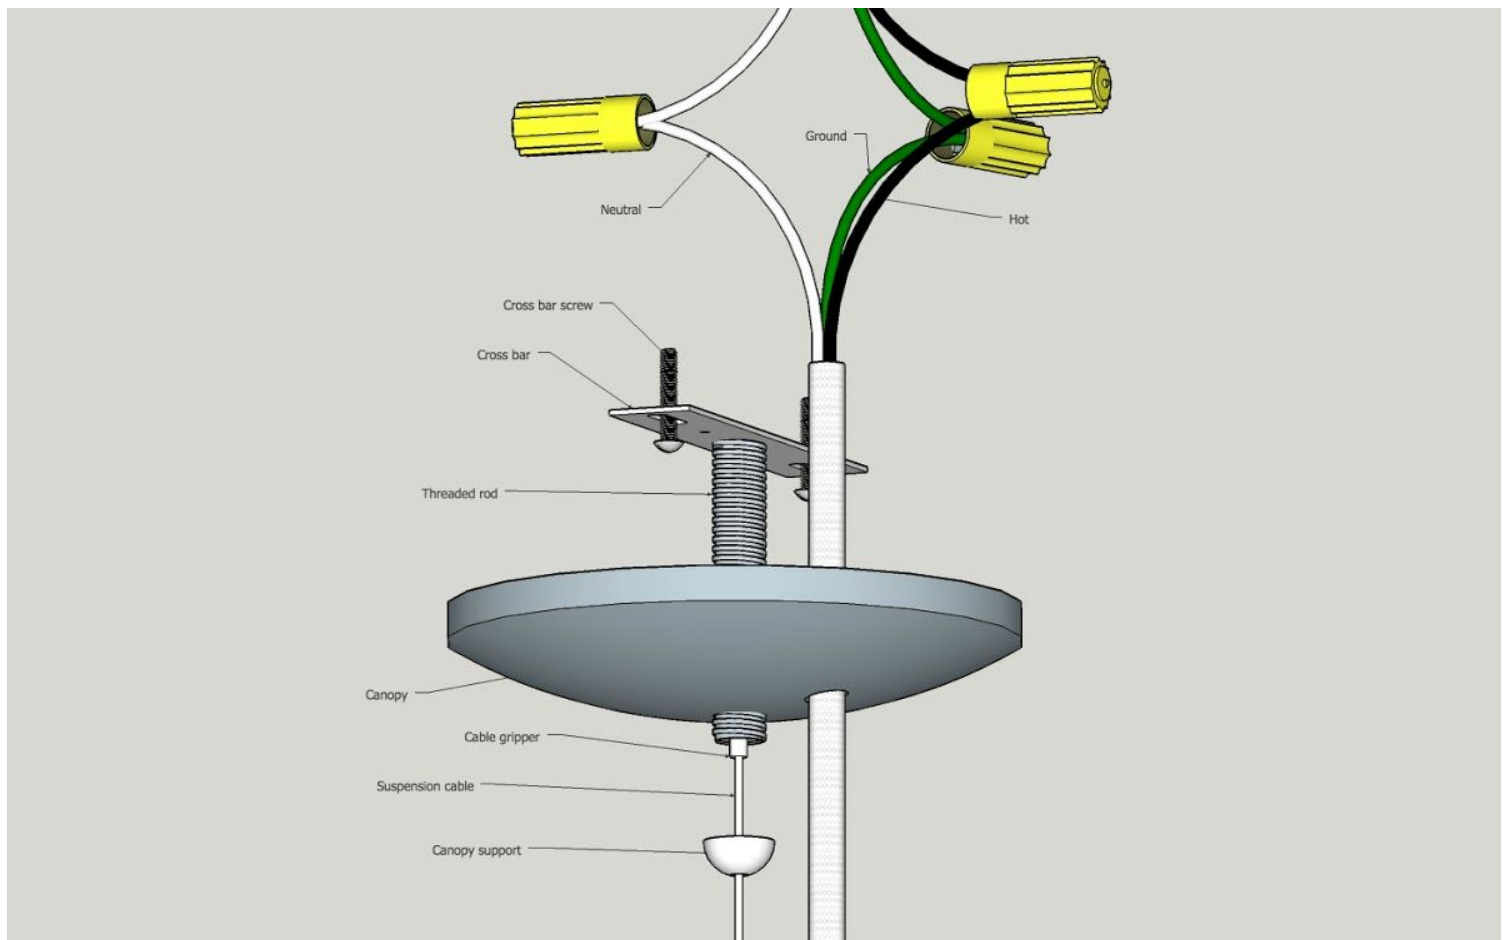

## CLEANING

Use only soft cloth to dust and clean fixture. Never use chemicals or abrasive cleaners as it may damage glass.